

EVERYTHING (surface)

Code: 806323122 (MM12.40)



Length: 1200mm
Section: 94x94mm
Weight: 5,1 kg net.

Features

Surface mounted or Pendant profile suitable installing under a solid ceiling

- Energy saving
- Full intensity from switch on
- Multiple (4 x) warm white 3.000°K LED nominal 7W
- Low operating temperature
- Long life
- Futureproof LED´s and fully interchangeable
- Integral driver with S.E.L.V. output
- Non-Dimmable (Standard)
- Dimmable on demand

Suspension set 1,5m to order
Code: 806590000 (MMSS15)



Manufactured to



Certified

Electrical Data

LED DRIVER (each)

Type	constant current
Input voltage	220/240Vac 50/60Hz
Input current	max. 0,16A
cos φ	>0,5

Electrical safety	Class II
Output isolation	S.E.L.V.


LUMINAIRE	
Electrical safety	Class III
Earthed housing	

LEDs	
Power per lighting unit	7 W @ 700 mA
Warm White	2875-3200K

Secondary connection	Top Connector prewired plug and socket to each lighting unit ready to install
----------------------	---

WARNING
Not for TRIAC-based (transistor, thyristor) switching.
Damage to driver inevitable

ECO-Dashboard




LED

IBL Gen³ LED lighting unit with CREE XLamp® CXA LEDs

Color Temperature CCT: 2 875-3 200 K
Light Output: approx. 600 lm

CRI: >= 80
L70 Lifetime: 30 000 h

Polar Diagram:

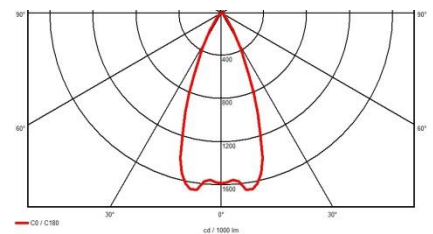

MIS 2 AWARD WINNER
NOVEMBER, 20 2014



Contact

IBL Lighting GmbH
Christinenstr. 11
D-40880 Ratingen
Tel: 02102- 94 20 66 0
Fax: 02102- 94 20 66 6
web: www.ibl.eu
email: info@ibl.eu