



EVERYTHING (surface)

Code: 806123190 (MM18.41)

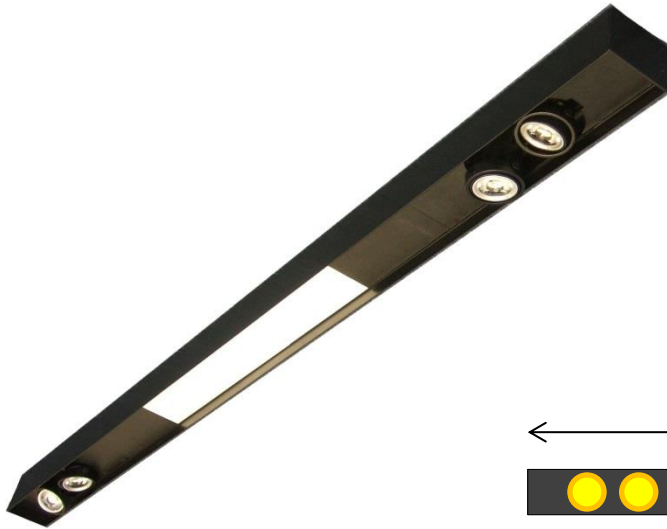

Length: 1800mm
Section: 94x94mm
Weight: 7,4 kg net.



Features

Surface mounted or Pendant profile suitable installing under a solid ceiling

- Energy saving
- Full intensity from switch on
- Multiple (4 x) warm white 3.000K LED nominal 7W
- 1 x LEDtube warm-white 3000K nominal 10W
- Low operating temperature
- Long life
- Futureproof LED's and fully interchangeable
- Integral driver with S.E.L.V. output

Suspension set 1,5m to order
Code: 806590000 (MMSS15)



Manufactured to



Certified

Electrical Data

LED DRIVER (each of 2)

Type	constant current
Input voltage	220/240Vac 50/60Hz
Input current	max. 0,16A
cos φ	0,8

Electrical safety	Class II
Output isolation	S.E.L.V.

LUMINAIRE	
Electrical safety	Class I
Earthed housing	

LEDs	
Power per LED Module	7 W @ 700 mA
Warm White	2875-3200K

Power of LEDtube	9 W
Warm White	3000K

Overall Power net.	38 W
--------------------	------


WARNING
Not for TRIAC-based (transistor, thyristor) switching.
Damage to driver inevitable

LED

IBL Gen³ LED lighting unit with CREE XLamp® CXA LEDs

Color Temperature CCT:	2 875-3 200 K
Light Output:	approx. 600 lm
CRI:	>= 80
L70 Lifetime:	30 000 h

Polar Diagram:

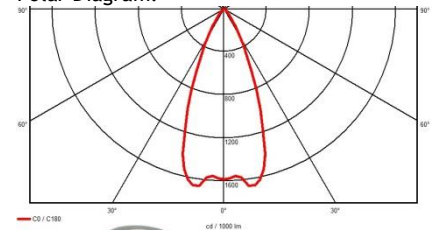

MIS 2 AWARD WINNER
NOVEMBER, 2014



Philips MASTER LEDtube

Color Temperature CCT:	= 3000 K
Light Output:	approx. 1000 lm
CRI:	83
B50L70 Lifetime:	50 000 h



Contact

IBL Lighting GmbH
Christinenstr. 11
D-40880 Ratingen
Tel: 02102- 94 20 66 0
Fax: 02102- 94 20 66 6
web: www.ibl.eu
email: info@ibl.eu

ECO-Dashboard

