

EVERYTHING (surface)

Code: 806423122 (MM18.60)



Length: 1800mm
Section: 94x94mm
Weight: 7,4 kg net.



Features

Surface mounted or Pendant profile suitable installing under a solid ceiling

- Energy saving
- Full intensity from switch on
- Multiple (6 x) warm white 3.000° K LED nominal 7W
- Low operating temperature
- Long life
- Futureproof LED's and fully interchangeable
- Integral driver with S.E.L.V. output
- Non-Dimmable (Standard)
- Dimmable on demand

Suspension set 1,5m to order
Code: 806590000 (MMSS15)



Manufactured to



Certified

Electrical Data

LED DRIVER (each)

Type constant current
Input voltage 220/240Vac 50/60Hz
Input current max. 0,16A
cos φ >0,5

Electrical safety Class II
Output isolation S.E.L.V.

LUMINAIRE
Electrical safety Class III
Earthed housing

LEDs
Power per lighting unit 7 W @ 700 mA
Warm White 2875-3200K

Secondary connection Top Connector
prewired plug
and socket to
each lighting
unit ready to
install

WARNING
Not for TRIAC-based (transistor,
thyristor) switching.
Damage to driver inevitable


LED

IBL Gen³ LED lighting unit with
CREE XLamp® CXA LEDs

Color Temperature CCT: 2 875-3 200 K
Light Output: approx. 600 lm

CRI: >= 80
L70 Lifetime: 30 000 h


Polar Diagram:

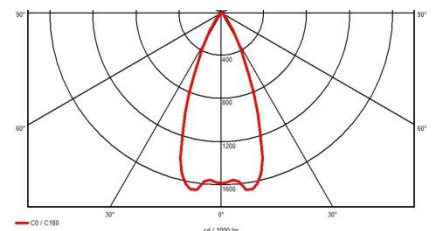

MIS 2 AWARD WINNER
NOVEMBER, 20 2014



ECO-Dashboard



Contact

IBL Lighting GmbH
Christinenstr. 11
D-40880 Ratingen
Tel: 02102- 94 20 66 0
Fax: 02102- 94 20 66 6
web: www.ibl.eu
email: info@ibl.eu