


## McD Ray Design "Track Light" L03

Order Code: **860323102**

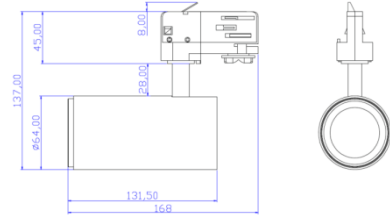

### Features

3-Phase Track adjustable Downlight with LED lamp, complete with SELV driver ready to install:

- Simple Track fixing
- Energy saving
- Low operating temperature
- Long lifetime LED
- Full intensity from switch on
- Driver with S.E.L.V. output
- Safe Class I luminaire
- IBL 5 Year warranty on fittings and drivers - 3 Years on IBL-LED Module

### Technical data

Dimensions: Height 132 mm  
Width: Ø 64 mm

Weight: ca. 0,65 kg incl. driver

Material: Diecast aluminium

Max. surface: 85° C

Colours: Black

### Electrical Data

#### LED DRIVER:

Type constant current  
Input voltage 220/240Vac 50/60Hz  
Input current max. 0,08A  
cos phi >0,5

Electrical safety Class II

Output isolation S.E.L.V.  
Output Current: 700 mA dc  
Output Voltage : max. 29 V dc

#### LUMINAIRE:

Electrical safety Class I

#### LEDs:

Power: 7W<sub>(nom.)</sub>@700 mA  
Warm White 2875-3200K

#### WARNING

Do NOT switch using TRIAC-based (transistor, thyristor) circuits. Damage to driver inevitable

### ECO-Dashboard




### LED specification

IBL Gen<sup>3</sup> LED lighting unit with CREE XLamp® CXA LEDs

Color Temperature CCT: 2 875-3 200 K  
Light Output: approx. 600 lm  
Beam angle: 24D

CRI: ≥ 80  
L70 Lifetime: 30 000 h

#### Polar Diagram:

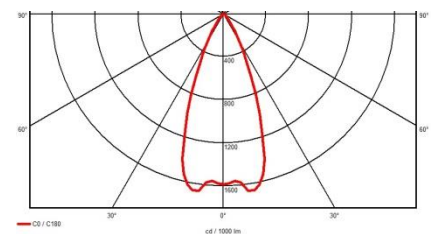

**MIS 2 AWARD WINNER**  
NOVEMBER, 20 2014



### Contact details

IBL lighting GmbH  
Christinenstr. 11  
D-40880 Ratingen  
Tel: +49-2102- 94 20 66 0  
Fax: +49-2102- 94 20 66 6  
web: [www.ibl.eu](http://www.ibl.eu)  
email: [info@ibl.eu](mailto:info@ibl.eu)